

## CLASS # 20

# 1" AIR IMPACT WRENCH

These heavy duty 1" drive impact wrenches feature high torque, and an oil lubricated 'rocking dog' clutch. They're ideal for tough applications, and heavy tire work on big trucks and tractors, as well as other farm equipment.

### 1" DR. IMPACT WRENCH LONG SHANK

Specifications:



- Max Torque: 1900 ft./lbs.
- 3 Speeds Forward & 3 Speeds Reverse
- Bolt Capacity: 1-3/8"
- Air Pressure: 90-110 PSI
- Air Inlet: 1/2" NPT
- Twin Hammer/ 6" Anvil
- Weight: 35 Lbs.

**ITEM#: 270**

### 1" DR. IMPACT WRENCH SHORT SHANK

Specifications:



- Max Torque: 1200 ft./lbs.
- Free Speed: 3800 RPM
- Bolt Capacity: 1-3/8"
- Air Pressure: 90-110 PSI
- Air Inlet: 1/2" NPT
- Twin Hammer/ 1" Anvil
- Includes: 1-1/2" & 1-5/8" Sockets
- Weight: 22 Lbs.

**ITEM#: 270S**

# CLASS # 19

## MONSTER 1" DR. IMPACT WRENCH

This 'Monster' impact wrench from Stark Tools features a hefty 4,000 ft./lbs. of torque. It has a long shank for reaching into deep spaces and has a 2" bolt capacity.

This is an excellent, heavy duty wrench for tractor trailer and truck repair, farm equipment and anywhere removal of large bolts is needed. This wrench comes with a heavy duty blow mold carrying case and (2) sockets.

### Specifications:

- Drive: 1"
- Bolt Capacity: 2"
- Max Torque: 4,000 ft./lbs.
- Free Speed: 3,500 RPM
- Air Inlet: 1/2" NPT
- Air Pressure: 115-175 PSI
- Weight: 48 lbs.
- Anvil: 8"
- Includes: Carrying Case & (2) Sockets (38mm & 41mm)



**ITEM#:**

**DESCRIPTION:**

**492**

**MONSTER 1" DR. IMPACT WRENCH**

## **CLASS # 20**

# **3/4" 1,000 LB. IMPACT WRENCH**

This is a heavy duty 3/4" drive air impact wrench that will deliver 1,000 foot pounds of torque and will peak at 1,200 foot pounds. The free speed is 3,800 RPM and they feature a low sound level of 90 decibels.

They have the exhaust through the handle for convenience as well as to keep the air away from your face and ears and operate at 90 PSI with just 12 CFM of air consumption. The housing and pin clutch are all aluminum, so they'll withstand years of shop abuse. Weight is 14 Lbs. IMPORTED



<b>ITEM#:</b>	<b>DESCRIPTION:</b>
<b>N145</b>	<b>3/4" 1,000 LB. NEIKO IMPACT WRENCH</b>

## CLASS # 20

# 3/4" AIR IMPACT WRENCH

These heavy duty 3/4" impact wrenches feature 500 foot pounds of torque, and the 'rocking dog' clutch with oil lubrication. They are ideal for tough applications such as farm implement work, engine tear downs, and general heavy maintenance applications.

They have a single handed operation for forward and reverse direction changes and a regulator control for variable speed adjustments. The oil bath lubrication of the hammer mechanism insures a long life.

They have a heavy duty metal housing and rubber scuff guard yet they are lightweight for fatigue free handling. Available in Short or Long Shank.  
IMPORTED



### Specifications:

- Working Torque: 100 – 500 Ft./Lbs.
- Blows Per Minute: 1,000
- Free Speed: 4,800 RPM
- Bolt Capacity: 1"
- Air Consumption: 12 CFM
- Air Inlet: 1/4" NPT
- Hose Size: 3/8" ID
- Weight: 10 1/2 Lbs.
- Length: 8 1/2"
- Long Shank Anvil: 2"
- Short Shank Anvil: 1"

### ITEM#:

### DESCRIPTION:

267	3/4" AIR IMPACT WRENCH – SHORT SHANK
268	3/4" AIR IMPACT WRENCH – LONG SHANK

**CLASS # 20**

**AIRCAT** **1/2" AIR IMPACT WRENCH**  
*SILENT POWER*

It used to be said that ‘if you muffle the noise, you’ll reduce the power’ when it came to air tools. Balderdash! Now ‘AirCat’<sup>®</sup> has completely busted that myth with their line of ‘Silent Power’ air tools.

Developed by ‘Exhaust Technologies’, these new low decibel/high torque air wrenches include high speed turbines, high quality bearing surfaces and air chambers, and a low decibel exhaust through the handle, not a front vent like other air wrenches, so there’s no more blow-by in the lungs and eyes.

These 1/2" pistol grip impacts have a built-in, cushioned grip handle and emit only 82 decibels at high torque. They have the twin hammer design, so you get up to an incredible 840 foot pounds. They develop 7,000 RPM and weigh only 5 1/2 Lbs. Available in long or short shank models. IMPORTED



**ITEM#: 1404-2 1/2" LONG SHANK**

**ITEM#: 1404 1/2" SHORT SHANK**



<b>ITEM#:</b>	<b>DESCRIPTION:</b>
<b>1404</b>	<b>AIRCAT 1/2" SHORT SHANK AIR WRENCH</b>
<b>1404-2</b>	<b>AIRCAT 1/2" LONG SHANK AIR WRENCH</b>

**CLASS # 20**

**AIRCAT** 1/2" x 1,000 Lb. AIR WRENCH  
*SILENT POWER*

This is the next generation of air tools! This Aircat® 1/2" Drive impact wrench delivers extreme power, a tuned exhaust, and it weighs only 4.3 Lbs. It has a working torque of 200 to 800 ft. Lbs. and a reverse loosening torque of 1,000 Foot Pounds.

The twin hammer mechanism delivers smooth power combined with a tuned exhaust system through the ergonomically designed handle. It features three forward settings and that one powerful reverse setting of 1,000 Ft/Lbs.

This is the smoothest, most powerful 1/2" air impact wrench available. It also features a patented valve system that minimizes vibration and because it's an Aircat® it's super quiet at only 84 DBA. IMPORT.



ITEM#:	DESCRIPTION:
AC1000TH	AIRCAT 1,000 LB 1/2" AIR IMPACT

## CLASS # 20

# 1/2" TWIN HAMMER IMPACT WRENCH

This square drive, 1/2" air impact wrench from Neiko Tools has the twin hammer mechanism that gives this pistol grip gun up to 500 foot pounds of torque and it has the same power in both forward and reverse.

The air speed is adjustable with a 5 selection torque knob and they have an average air consumption of 10.2 CFM at 90 PSI. The free Speed is 7,000 RPM and they have the standard 1/4" NPT air inlet for a 3/8" air hose. They have a side exhaust system and are available in short shank or 2" long shank. Imported.



### ITEM#:

### DESCRIPTION:

N093	1/2" TWIN HAMMER IMPACT WRENCH - SHORT
N093L	1/2" TWIN HAMMER IMPACT WRENCH - LONG

# CLASS # 20

## 1/2" TWIN HAMMER IMPACT WRENCH

This is a powerful air impact wrench with 800 maximum ft. lbs. of torque and 4 torque settings for 245, 270, 320 & 608 ft. lbs. The free speed rating on this tool is 5,500 rpm with an air consumption of 4.5 cfm at 90 psi. Takes standard 3/8" air hose with 1/4" fittings. Import.



**ITEM#:**

**DESCRIPTION:**

**N071**

**1/2" DR. TWIN HAMMER AIR IMPACT WRENCH**

## **CLASS # 20**

# **1/2" AIR IMPACT WRENCH**

These are heavy duty impact wrenches, used primarily by auto repair mechanics and tire shops for removing lug nuts but are also used by anyone with an air compressor and a need for tightening or untightening bolts and nuts with impact sockets.

They are heavy duty, industrial quality and feature 280 foot pounds of torque, an oil lubricated 'rocking dog clutch', and an air regulator control for variable speed adjustment.

It takes a standard 3/8" I.D. air hose, and operates at 90 PSI with air consumption of 4CFM. It has a heavy duty metal housing and a rubber scuff guard to protect work and housing and is available in both short and long shank models, the long shank is approximately 2". **IMPORTED**



**ITEM#:**

**DESCRIPTION:**

<b>265</b>	<b>1/2" AIR IMPACT WRENCH – SHORT SHANK</b>
<b>266</b>	<b>1/2" AIR IMPACT WRENCH – LONG SHANK</b>

## CLASS # 20

# 3/8" IMPACT WRENCHES

These are heavy duty 3/8" impact wrenches used for all types of general purpose work. These units come in either pistol grip, (like a gun) or butterfly style, (palm grip with a butterfly trigger for single handed control of speed).

The built in power regulators adjust the torque and they have aluminum housings. The butterfly has a rubber boot on the front. IMPORTED



### 3/8" BUTERFLY IMPACT WRENCH

#### Specifications:

- Bolt capacity: 3/8"
- Maximum Torque: 75 Ft Lbs.
- Free Speed: 10,000 RPM
- Air inlet: 1/4"
- Works with standard 3/8" ID air hose
- Air consumption: 4 CFM
- Air pressure: 90 - 120 PSI



### 3/8" PISTOL GRIP IMPACT WRENCH

#### Specifications:

- Bolt capacity: 3/8"
- Maximum Torque: 125 Ft Lbs.
- Free Speed: 8,000 RPM
- Air inlet: 1/4"
- Works with standard 3/8" ID air hose
- Air Pressure: 90 – 120 PSI
- Air consumption: 4 CFM

ITEM#:	DESCRIPTION:
260	3/8" BUTTERFLY IMPACT WRENCH
261	3/8" PISTOL GRIP IMPACT WRENCH

## CLASS # 20

# 3/8" & 1/2" DRIVE AIR RATCHET

These are industrial grade square drive air ratchets. They are new high powered units that provide plenty of power to complete otherwise lengthy jobs fast. These units put out a lot of torque for their size yet they're not 'air hogs'. They run on as little as 90 PSI and they are available in both 3/8 and 1/2" square drives.



### Specification:

- 1/2" Square drive
- Bolt Capacity: 3/8"
- Free speed: 150 RPM
- Air consumption: 4 CFM
- Air inlet size: 1/4"
- Max Torque: 50 Ft. Lbs
- Air Pressure: 90 PSI
- Hose size: 3/8" ID
- Weight: 2.7 Lbs

**1/2" Drive Air Ratchet**

---



### Specification:

- 3/8" Square drive
- Free speed: 160 RPM
- Air consumption: 4 CFM
- Air inlet size: 1/4"
- Max Torque: 45 Ft. Lbs
- Air Pressure: 90 PSI
- Hose size: 3/8" ID
- Weight: 2.5 Lbs

**3/8" Drive Air Ratchet**

ITEM#:	DESCRIPTION:
262	1/2" SQUARE DRIVE AIR RATCHET
263	3/8" SQUARE DRIVE AIR RATCHET

## CLASS # 20



### 3/8" LARGE AIR RATCHET

Exhaust technologies, the company making Aircat pneumatic tools, has shattered the myth that “muffling the noise will reduce the power” in air tools, and just in time, because OSHA is on the campaign to start issuing citations for excessive noise levels, especially targeting air tools.

These new, high torque, low decibel air ratchets are the perfect addition to their air impact line. The internal mechanisms on these ratchets combine high speed turbines, top quality bearing surfaces, and extremely low decibel exhaust to revolutionize air tools.

This full size, 12” long, air ratchet has a free speed of 180 RPM, and maximum torque of 90 ft./lbs. They only weigh 2.75 lbs., and generate only 82 decibels of noise. **IMPORTED**



#### Specifications:

- **Maximum Torque: 90 Ft Lbs**
- **Sound Level: 82 Db**
- **Air Pressure: 90 PSI**
- **Air Inlet: 1/4"**
- **Air Consumption: 3.5 CFM**
- **Free Speed: 180 RPM**

**ITEM#:**

**DESCRIPTION:**

**AC802**

**AIRCAT 3/8" LARGE RATCHET**

# **CLASS # 20**

## **1/4" AIR RATCHET**

Our little 1/4" air ratchets fit in the palm of your hand and work in any area that you can reach your hand into.

It's compact in size, but really does a big job. It's 230 RPM for quick nut running and 30 foot pound of breaking power. For the really tough nuts and bolts, you can manually use the air tool as a hand tool to break them free, so you don't have to keep switching tools.

They're only 6" long and weigh only 1 1/8 lbs, and hook right up to a 3/8" air hose. They are all ball and needle bearing construction in a highly polished alloy steel body. They'll take a lot of banging around and still keep performing.



<b>ITEM#:</b>	<b>DESCRIPTION:</b>
<b>284</b>	<b>1/4" AIR RATCHET</b>

## CLASS # 20



## 1/4" MINI RATCHET

AirCat is the hot new air tool line that delivers a lot of power, but has managed to reduce the noise levels to well below OSHA's newly allowed decibel ratings for pneumatics. These 1/4" mini ratchets are only 8" overall length. They get into the smallest places for the toughest work, without jeopardizing power or noise levels.

This has a full 230 RPM of free speed, 50 ft/lbs of torque, and it only weigh 1 1/4 Lbs. The decibel level at highest torque is only 82 DBA, well below the new reduced levels allowed by OSHA. **IMPORTED**



### Specifications:

- **Maximum Torque: 45 Ft Lbs.**
- **Working Torque: 35 Ft. Lbs**
- **Sound Level: 82 DBA**
- **Free speed: 230 RPM**
- **Air consumption: 2.8 CFM**
- **Air pressure: 90 PSI**
- **1/4" Air inlet**

**ITEM#:**

**DESCRIPTION :**

**AC800**

**AIRCAT 1/4" MINI RATCHET**

## CLASS # 20



## 3/8" MINI RATCHET

All the power at half the noise! The superior mechanics of the Aircat<sup>®</sup> low noise air impact wrench includes high-quality bearing surfaces, air chambers and turbines. The patented exhaust muffler and filter technology reduces the level of noise while retaining more power and torque. A quiet, powerful tool ideal for shop or home applications.

### Specifications:

- **Maximum Torque: 45 Ft Lbs.**
- **Working Torque: 35 Ft. Lbs**
- **Sound Level: 82 DBA**
- **Free speed: 320 RPM**
- **Air consumption: 2.8 CFM**
- **Air pressure: 90 PSI**
- **1/4" Air inlet**



**ITEM#:**

**DESCRIPTION :**

**AC801R**

**AIRCAT 3/8" MINI RATCHET**

## CLASS # 20

# AIR DIE GRINDERS

These are the heavily used die grinders that you find in every automotive and machine shop. They hold the mounted stones, carbide burrs, those little cutoff wheels, prep pads, and a lot of other cutting tools. They turn 23,000 RPM and have all ball bearing construction for long life.

These little grinders can be used for cutting, grinding, carving, sanding, polishing, porting, deburring and more on plastic, wood, metal, fiberglass, and ceramics.

The right angle die grinder is a must for prep pads. The angle die grinder has the same specifications. IMPORTED.



### 1/4" AIR DIE GRINDER

#### Specifications:

- Free Speed: 22,000 RPM
- 1/4" capacity
- Inlet size: 1/4" NPT
- Hose size: 3/8" ID
- Air consumption: 6 CFM
- Length: 6 5/8"
- Lever throttle for feather control
- Rear exhaust air flow system

### 1/4" ANGLE AIR DIE GRINDER

#### Specifications:

- Free Speed: 20,000 RPM
- 1/4" capacity
- Inlet size: 1/4" NPT
- Hose size: 3/8" ID
- Air consumption: 4 CFM
- Length: 6"
- Lever throttle for feather control
- Rear exhaust air flow system

#### ITEM#:

#### DESCRIPTION:

272	1/4" CAPACITY AIR DIE GRINDER
273	1/4" CAPACITY ANGLE HEAD DIE GRINDER

# CLASS # 20

## **AIRCAT** 1/4" ANGLE DIE GRINDER

**SILENT POWER**

Aircat® is the hot new air tool line that delivers all the power you need from your tools but has managed to considerably reduce the noise levels to well below OSHA's new allowed decibel ratings for pneumatics.

Compact, yet powerful, these great new Aircat® die grinders will deliver the maximum rpm and can easily reach into the smallest of areas. Available in straight head or angle head which has a collet that is 90° to the body of the tool so you get increased access in tight spaces.

They will hold any 1/4" shank mounted stones, burrs, or other accessories and run at 90 PSI with an average air consumption of just 7.8 CFM with a sound level of just 82dBa. Import.

### STRAIGHT DIE GRINDER



### ANGLE HEAD DIE GRINDER



#### Specifications:

- 22,000 RPM Free Speed
- 90 PSI
- Direct Gear Mechanism
- 82 dBa
- 1.6 lbs.

**ITEM#: AC6201**

#### Specifications:

- 20,000 RPM Free Speed
- 90 PSI
- Direct Gear Mechanism
- 82 dBa
- 1.1 lbs.

**ITEM#: AC6255**

ITEM#:	DESCRIPTION:
AC6201	AIRCAT® 1/4" STRAIGHT AIR DIE GRINDER
AC6255	AIRCAT® 1/4" ANGLE AIR DIE GRINDER

# CLASS# 20

## 3" AIR CUTOFF TOOL

This tool is perfect for cutting body panel when used with the 3" cutoff wheels. They are industrial quality air cut off saws that spin at 18,000 RPM and operate at just 90 PSI, and the air consumption is just 4 CFM.

Unlike a standard die grinder that does the same thing, these tools have a clear safety shield to deflect sparks away from your body but won't block your vision while cutting. They're perfect for cutting muffler, body panels, rebar, and other sheet metal.

They take a standard 3/8" air hose and the housing is constructed of an impact resistant, composite material. 6 3/4" long. IMPORTED



*DON'T FORGET EXTRA CUTOFF WHEELS!*

**ITEM#:**

**DESCRIPTION:**

269

3" AIR CUTOFF TOOL

**CLASS # 20**  
**AIRCAT** 3" AIR CUT OFF TOOL  
*SILENT POWER*

Exhaust Technologies, the company that makes Aircat<sup>®</sup> pneumatic tools, has shattered the myth that “muffling the noise will reduce the power” in air tools. This comes just in time too, because OSHA is on a campaign to start issuing citations for noise levels, especially targeting air tools.

Now they’ve added their new 3” cut off tool to the line, and just like all the Aircat tools, this one exhausts through the bottom of the tool to reduce ‘blow-by’.

They deliver 20,000 RPM and have the butterfly lever built into the body of the tool and a full wheel cover for safety. The sound pressure level, like in all Aircat tools, is an incredibly low 82 decibels. **IMPORTED**



***DON'T FORGET CUT OFF WHEELS!!***

ITEM#:	DESCRIPTION:
AC6505	AIRCAT 3" AIR CUT OFF TOOL

**CLASS # 20**  
**AIRCAT** 3/8" REVERSIBLE AIR DRILL  
*SILENT POWER*

Exhaust Technologies, the manufacturers of AirCat® Pneumatic tools, has shattered the myth that “muffling the noise will reduce the power” in air tools. This revolution comes just in time, because OSHA is on the campaign to start issuing citations for noise levels, especially targeting air tools.

Now they’ve added their 3/8”, reversible air drill. This work horse of a drill delivers 1,800 RPM free speed with a super low 82 decibels of sound. These are beautiful, soft grip drills with the 3/8” keyless chuck built right in. They are completely reversing in action with the flip of a thumb switch and the exhaust is through the bottom of the pistol grip, so there is no blow-by in tight spaces. 90 PSI, 4 CFM air consumption, only 2.2 Lbs.



**ITEM#:**

**DESCRIPTION:**

**AC4314**

**AIRCAT 3/8" REVERSIBLE AIR DRILL**

# **AIRCAT** 1/2" REVERSIBLE AIR DRILL

**SILENT POWER**

It used to be said that 'if you muffle the noise, you'll reduce the power' when it came to air tools. Balderdash! Now 'AirCat'<sup>®</sup> has completely busted that myth with their line of 'Silent Power' air tools.

Now they've added their 1/2", reversible air drill. These tough drills will deliver 400 RPM of free speed with a super low 82 decibels of sound. They have an all-metal side assist handle to help you hold onto the torque.

These are beautiful drills with padded handles and the 1/2" keyless chuck built right in. They are completely reversible with the flip of a thumb switch, and the exhaust is through the bottom of the pistol grip, so there is no blow-by in tight spaces. 3.3 CFM. 90 PSI. 3 1/2 Lbs. IMPORTED



ITEM#:	DESCRIPTION:
AC4413	AIRCAT 1/2" REVERSIBLE AIR DRILL

# CLASS # 20

## 1/2" REVERSIBLE AIR DRILL

This is a heavy duty 1/2" air drill from 'Neiko Tools'. It features the muffled exhaust in the handle and a one hand reverse lever, as well as a side assist handle for better control.

The variable speed trigger offers easy start of holes and is completely reversible. The free speed is 500 RPM and it operates at 90 PSI and features a planetary gear system for smooth running and years of great performance. Has a 1/4" air inlet and takes a standard 3/8" hose. IMPORTED



ITEM#:	DESCRIPTION:
282	1/2" REVERSIBLE AIR DRILL

## **CLASS # 20**

# **3/8" RIGHT ANGLE AIR DRILL**

This is a heavy duty 3/8" air drill with a 90° right angle to get into those hard to reach areas. No need to disassemble your project just to drill a hole and it will fit into just about any tight spot.

It has double reduction planetary gears hardened for long life and smooth running. They have 1,900 RPM free speed and an easy trigger action throttle control. Operates at 90 to 120 PSI with 4 CFM air consumption and features a 3/8" keyless chuck. IMPORTED



**ITEM#:**

**283**

**DESCRIPTION:**


**3/8" RIGHT ANGLE AIR DRILL**

# CLASS # 20

## 3/8" REVERSIBLE AIR DRILL

This heavy duty 3/8" reversible air drill is ideal for all general service drilling. It features double reduction planetary gears for long life and smooth full torque. It runs at 2,200RPM and has a positive action trigger throttle for fine speed control.

The muffler in the handle reduces noise and directs the air away from your work. Operates at 90 PSI and 4 CFM air consumption. Has a key chuck and a standard 1/4" air inlet for 3/8" hose. This is the perfect air drill for any shop. IMPORTED

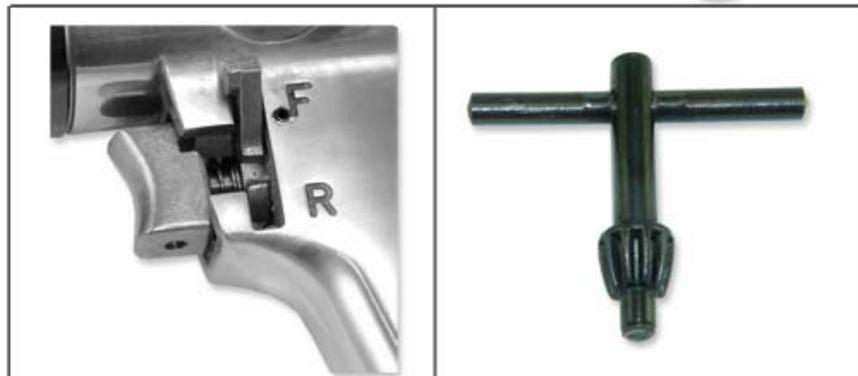

**ITEM#:**

**DESCRIPTION:**

**ADR**

**3/8" REVERSIBLE AIR DRILL**

## CLASS # 20

# DIE GRINDER W/ 1/8" & 1/4" COLLETS

This M7 air die grinder is handy and ergonomic and provides excellent maneuverability. The high powered 0.9 HP motor efficiently handles tough jobs and at only 75.7 dBA this grinder is quieter than Aircat.

What makes this grinder even more unique is that it comes with both 1/8" and 1/4" collets for greater versatility.



### Specifications:

- Size: 7-1/2"
- Weight: 1.4 Lbs.
- Decibels: 75.7 dBA
- Air Pressure: 90 PSI
- Air Consumption: 10 CFM
- RPM: 20,000
- Collets: 1/8" & 1/4"
- Air Inlet: 1/4"

**ITEM#:**

**DESCRIPTION:**

**BW211**

**DIE GRINDER WITH 1/4" & 1/8" COLLETS**

## CLASS # 20

# MIGHTY MINI 3/8" IMPACT WRENCH

This mighty mini impact wrench is very compact yet very powerful. It is the shortest impact wrench on the market at just 4-9/16" from the back to the end of the anvil and 6-1/2" from top to bottom.

Don't let its small size fool you, because this wrench is also mighty powerful, reaching 350 ft-lbs of torque in less than 5 seconds! And...at just 85 decibels, it is also one of the quietest impact wrenches around.

### Specifications:

- Size: 4-9/16" x 6-1/2"
- Weight: 3.3 Lbs.
- Max. Torque: 350 ft-lbs.
- Decibels: 85 dBA
- Air Inlet: 1/4"
- RPM: 8,000
- PSI: 90
- Speeds: 3 Forward & 1 Reverse



**ITEM#:**

**BW38**

**DESCRIPTION:**

**COMPACT 3/8" IMPACT WRENCH**

## CLASS # 20

# MIGHTY MINI 1/4" AIR RATCHET

At just 5" overall length, this is one of the most compact air ratchets on the market. The small size makes it perfect for applications in tight spaces like under dashboards. Even with its small size, it is still very powerful at 22 ft-lbs of maximum torque and a free speed of 350 rpm.

It can be used comfortably with one hand and features a convenient on/off paddle switch and an easy to use forward and reverse valve.



### Specifications:

- Square Drive: 1/4"
- Overall Length: 5"
- Max. Torque: 22 ft-lbs.
- Decibels: 89 dBA
- Torque Range: 5-15 ft-lbs.
- RPM: 350
- PSI: 90
- Average Air Consumption: 3.9 CFM
- Net Weight: 1.1 lb.

**ITEM#:**

**DESCRIPTION:**

**BW14AR**

**1/4" DRIVE MIGHTY MINI AIR RATCHET**

## CLASS # 20

# MIGHTY MINI 1/2" IMPACT WRENCH WITH SAE STUBBY SOCKETS

This mighty mini impact wrench is very compact yet very powerful. It is the shortest impact wrench on the market at just 4-9/16" from the back to the end of the anvil and 6-1/2" from top to bottom.

Don't let its small size fool you, because this wrench is also mighty powerful, reaching 500 ft-lbs of torque in less than 5 seconds! And...at just 85 decibels, it is also one of the quietest impact wrenches around.

### Specifications:

- Size: 4-9/16" x 6-1/2"
- Weight: 3.5 Lbs.
- Max. Torque: 500 ft-lbs.
- Decibels: 85 dBA
- Air Inlet: 1/4"
- RPM: 9,000
- PSI: 90
- Speeds: 3 Forward & 1 Reverse
- Includes 6 SAE Sockets: 1/2", 9/16", 5/8", 11/16", 3/4" & 7/8"



**ITEM#:**

**DESCRIPTION:**

**BW12S**

**MINI 1/2" IMPACT WRENCH W/ SAE SOCKETS**

## CLASS # 20

# MIGHTY MINI 1/2" IMPACT WRENCH WITH METRIC STUBBY SOCKETS

This mighty mini impact wrench is very compact yet very powerful. It is the shortest impact wrench on the market at just 4-9/16" from the back to the end of the anvil and 6-1/2" from top to bottom.

Don't let its small size fool you, because this wrench is also mighty powerful, reaching 500 ft-lbs of torque in less than 5 seconds! And...at just 85 decibels, it is also one of the quietest impact wrenches around.

### Specifications:

- Size: 4-9/16" x 6-1/2"
- Weight: 3.5 Lbs.
- Max. Torque: 500 ft-lbs.
- Decibels: 85 dBA
- Air Inlet: 1/4"
- RPM: 9,000
- PSI: 90
- Speeds: 3 Forward & 1 Reverse
- Includes 6 Metric Sockets: 13mm, 17mm, 19mm, 21mm, 22mm & 24mm



**ITEM#:**

**DESCRIPTION:**

**BW12M**

**MINI 1/2" IMPACT WRENCH W/ MET SOCKETS**

## CLASS # 20

# MIGHTY MINI 1/2" IMPACT WRENCH

This mighty mini impact wrench is very compact yet very powerful. It is the shortest impact wrench on the market at just 4-9/16" from the back to the end of the anvil and 6-1/2" from top to bottom.

Don't let its small size fool you, because this wrench is also mighty powerful, reaching 500 ft-lbs of torque in less than 5 seconds! And...at just 85 decibels, it is also one of the quietest impact wrenches around.

### Specifications:

- Size: 4-9/16" x 6-1/2"
- Weight: 3.5 Lbs.
- Max. Torque: 500 ft-lbs.
- Decibels: 85 dBA
- Air Inlet: 1/4"
- RPM: 9,000
- PSI: 90
- Speeds: 3 Forward & 1 Reverse



**ITEM#:**

**DESCRIPTION:**

**BW12**

**COMPACT 1/2" IMPACT WRENCH**

## CLASS # 20



## 3/8" COMPOSITE AIR DRILL

The Aircat<sup>®</sup> reversible drill features a sleek and rugged composite body as well as a feather trigger and a Jacobs chuck. It is constructed with superior grade steel planetary gears for longer life and has the patented quiet technology for less noise at just 85 decibels.

The patented tuned exhaust muffler technology allows discharged air to pass without developing back pressure reducing hazards from breathing exhausted air particulates and blow-by into the operators eyes.



### Specifications:

- 3/8" Jacobs Chuck
- Overall Length: 7"
- Free Speed: 1,800 RPM
- Weight: 2.5 lbs.
- Noise Level: 85 dBA
- Air Consumption: 4 CFM
- Air Pressure: 90 PSI
- CE Certified
- Meets EU Safety, Health & Environmental Requirements

**ITEM#:**

**DESCRIPTION:**

**AC4338**

**AIRCAT<sup>®</sup> COMPOSITE 3/8" AIR DRILL**

## CLASS # 20

# 57 PC MINI 3/8" HYBRID RATCHET KIT

This handy 57 piece kit features a hybrid 3/8" ratchet that also acts as a 1/4" drive ratchet. The outside square drive shaft holds 3/8" drive sockets and extensions while the hollow inside of the shaft holds 1/4" drive sockets and bits.

This kit includes most popular small bits and drivers and the compact size allows for working in tight spaces like under a dashboard. There are (7) 1/4" drive sockets, (6) 3/8" drive sockets, (40) 1/4" bits, (1) 3/8" extension bar, (1) 1/4" hex shank driver and (1) plug adapter. All 57 pieces rest inside a rugged blow mold carrying case.

### Ratchet Specifications:

- Overall Length: 5"
- Max. Torque: 22 ft-lbs.
- Decibels: 89 dBA
- Torque Range: 5-15 ft-lbs.
- RPM: 350
- PSI: 90



**ITEM#:**

**DESCRIPTION:**

**BW3857**

**57 PC. MINI HYBRID 3/8"-1/4" RATCHET KIT**

# CLASS # 20

## AIR NIBBLER

This is an industrial quality air nibbler that can actually shear through aluminum and steel in just seconds. The Precision planetary gearing delivers 3,500 strokes per minute for fast cutting with minimum distortion.

The rugged nibbling head will cut steel up to 1/16" and aluminum up to 5/64". It can cut limited curved designs to a minimum of 1/2" radius. For nibbling plastic, tin, aluminum, and other metals up to 18 gauge rolled steel.

It has easy access to punch and die for quick replacement, and teasing throttle for precise control. The rear exhaust directs air away from your work area. It features precision, heat treated gearing, and a lightweight, aluminum body. Has a standard 1/4" air inlet, operates at 4 CFM and is the perfect tool for auto body shops, tinsmiths, and sheet metal shops. Imported.



**ITEM#:**

**287**

**DESCRIPTION:**

**AIR NIBBLER**

## CLASS # 20

# DUAL PISTON STRAIGHT LINE SANDER

The dual piston straight line sander is very popular in auto body shops and performs on any type of plastic at any stage of the hardening process.

The two handle design gives you comfortable operation and excellent control for “feathering” with ease, and the dual piston feature gives you a lot of power and prevents stalling. It has a one inch stroke and 2,100 strokes per minute. They’re built to take the constant use that the pros demand.



### Specification:

- **Pad Dimensions:** 2 3/4” x 17 1/2”
- **Overall Length:** 17 1/2”
- **Air Consumption:** 6 CFM
- **Air Pressure:** 90 – 120 PSI
- **Free Speed:** 2,100 SPM
- **Air Inlet:** 1/4” NPT
- **Hose Size:** 3/8”
- **Weight:** 6 1/2”

**ITEM#:**

**DESCRIPTION:**

**274**

**PNEUMATIC STRAIGHT LINE SANDER**

## CLASS # 20

# JITTERBUG AIR SANDER DUAL ACTION SANDER

These are industrial grade air sanders that are ideal for sanding wood, metal and plastic. They are top quality units that feature aluminum housing, ball bearing construction and built in air regulators for more control. The dual action, ('DA') sander uses a 5" or 6" disc that rotates in a dual circular motion for optimum sanding quality. The palm sander (also known as a 'Jitterbug') rotates in a single circular motion.



**ITEM#: 275 6" DUAL ACTION SANDER**

**Specifications:**

- 10,000 RPM
- 4 CFM Air Consumption
- 90 PSI
- 4 Ball Bearing Construction
- 5" or 6" Disc Size
- 1/4" Air Inlet



**ITEM#: 276 JITTERBUG SANDER**

**Specifications:**

- 8,000 RPM
- 6 CFM Air Consumption
- 90 PSI
- Ball Bearing Construction
- Pad Size: 3 1/2" x 6 3/4"
- 1/4" Air Inlet

ITEM#:	DESCRIPTION:
275	6" DUAL ACTION SANDER
276	JITTERBUG SANDER

# CLASS # 20

## VACUUM READY ORBITAL SANDER

This 6" diameter, random orbital sander is vacuum ready so it can be hooked up to a shop vac for removal of sanding dust while working. It features a 2' hose, and ergonomic grip design to reduce user fatigue.

It is constructed of aluminum alloy and rubber housing with double axles. No load speed is 10,000 rpm, air consumption is 4 cfm at 90 psi air pressure. Import.



**ITEM#:**

**DESCRIPTION:**

**350**

**6" VACUUM READY ORBITAL SANDER**

## CLASS # 20

# HVLP AIR PAINT SPRAY GUN

These HVLP spray guns cut down the waste of material by one third to one half. They eliminate the over-spray and all that aerated paint that hangs in the air. You'll start saving money, your health, and a possible EPA fine, from day one!

Instead of 90-120 PSI of air pressure, these guns require as little as 50 PSI and deliver more paint to the desired area in less time. The pressure to the cap of the gun is only 6 PSI.

Instead of "beating" the area you're painting with a high pressure spray gun, this gun allows the paint to lay down smoothly, so it doesn't bounce off the metal or any other surface.

This is the pistol grip type with the one quart canister that hangs under the nozzle. It comes equipped with the standard 1 mm orifice nozzle and the fully adjustable regulator. IMPORTED



ITEM#:	DESCRIPTION:
291	HVLP AIR PAINT SPRAY GUN

# CLASS # 20

## HVLP AIR SPRAY GUNS

These HVLP (High Volume Low Pressure) air paint spray guns come in three nozzle sizes for various spray applications. They are gravity feed type and have an aluminum, 600cc cup, (about 1.28 pints).

Operation pressure is 40 PSI, working pressure is 10 PSI and they have an air consumption of 4.5 CFM. The nozzles are color coded to distinguish between the three nozzle sizes; green is a 1.5mm nozzle, yellow is a 1.7mm and red is a 2.0mm.

The gun is a black nickel finish and they have an easy to read pressure gauge. The desired pattern, volume of fluid output and fine atomization can be easily obtained by regulating the pattern adjusting knob, the fluid (paint) adjusting knob and the air adjusting knob. IMPORTED



**Green**

- 1.5mm nozzle
- For clear coat and color

**Yellow**

- 1.7mm nozzle
- For base and clear coat

**Red**

- 2.0mm nozzle
- For primer and finish

ITEM#:	NOZZLE:	DESCRIPTION:
N164G	● GREEN - 1.5mm	HVLP PAINT SPRAY GUN
N164Y	● YELLOW - 1.7mm	HVLP PAINT SPRAY GUN
N164R	● RED - 2.0mm	HVLP PAINT SPRAY GUN

## CLASS # 20

# HVLP AIR PAINT SPRAY GUN

This is the HVLP (High Volume Low Pressure) air paint spray gun that meets the new auto paint industry regulations for low pressure paint guns. It has a gravity feed design in that the the 20 oz. plastic canister holds the paint from above instead of below and gravity naturally makes the paint flow into the gun nozzle.

They have a high gloss gun finish for easy clean up and stainless steel needle and fluid tips. They also feature the pressure guage and operate at 43 to 50 PSI with an average 8.8 CFM air consumption. The fluid nozzle size is 1.4 mm and features an anti drip design. IMPORTED



**ITEM#:**

**DESCRIPTION:**

**281**

**HVLP GRAVITY FEED AIR PAINT SPRAY GUN**

## CLASS # 20

# MINI HVLP AIR SPRAY GUN

These air spray guns are just like the big 1 quart container spray guns that most shops have, only smaller. For touch up jobs and small applications, it's a lot easier to use this lighter, mini spray gun.

This is a gravity feed system with a 125cc cup above the spray gun as opposed to beneath it like an ordinary gun. It gives you a smooth, consistent spray pattern of 190mm by utilizing the best combination of atomization and high working speed.

They feature a high quality gauge, and operate at 50 PSI with average air consumption of 8.8 CFM. The brass nozzle on the gun is 1.0mm and the transfer efficiency exceeds 75%, and since there is low overspray it will give you substantial savings in operating costs. IMPORTED



**ITEM#:**

**281M**

**DESCRIPTION:**

**MINI HVLP AIR SPRAY GUN**

## CLASS # 20

# 7 PC. AIR HAMMER AND CHISELS KIT

You can use these air hammers and chisels on almost any material with professional results. They're very effective in chiseling off slag from welds, busting bad welds loose, and almost any other type of general purpose work.

This kit includes four heavy duty chisel bits; a bushing splitter, a tapered punch, a ripping chisel and a weld buster. This kit also includes a coil spring retainer for easy chisel changes and the air hose connector.

They have a 150 mm barrel length with a 1 5/8" stroke and bang at 4,500 blows per minute. They operate at 90 PSI with an average air consumption of 4 CFM. The bore diameter is 3/4" and they have a standard 1/4" air inlet. IMPORTED.



**ITEM#:**

**DESCRIPTION:**

271

7 PC. AIR HAMMER WITH CHISEL SET

## CLASS # 20

# METAL CUTTING AIR SHEARS


These metal cutting shears will handle many of your metal cutting needs like sheeting, car or truck body work, or metal containers, quicker and easier than a hacksaw or a cutoff tool.

These shears are perfect for car body or aircraft panels and will give you a burr free cut and a clean edge. Imported.



#### Specifications:

- Free speed: 3,200
- Air pressure: 90 PSI
- Air consumption: 4 CFM
- Capacity: 1.6mm
- Hose: 3/8"

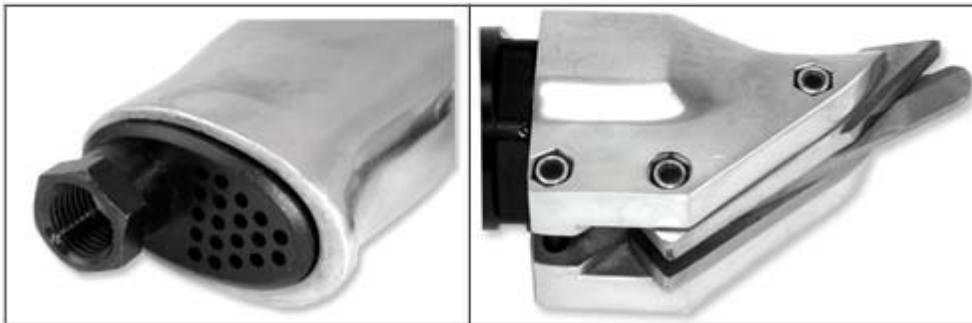

**ITEM#:**

**DESCRIPTION:**

**N074**

**METAL CUTTING AIR SHEARS**

## CLASS # 20 AIR GREASE GUN

These air grease guns are industrial quality, one handed, pistol grip type. They are lightweight and easy to use. You get 1,200 to 6,000 PSI per trigger pull to deliver the appropriate amount of grease. They work with any grease cartridge or can easily be hooked up for bulk feed out of a drum.

They feature a heavy duty, cast aluminum body and a bleeder valve for purging unwanted air. The follower rod and spring are very durable and will provide consistent priming. Standard 1/4" air inlet. IMPORTED



ITEM#:

278

DESCRIPTION:

AIR GREASE GUN

## CLASS # 20

# 7" POLISHER - SANDER - GRINDER

This is an industrial grade 7" air sander, grinder, and buffer that is truly a remarkable tool. It is ideal for sanding wood, metal and plastic and features an aluminum body construction, 4,500 RPM free speed, and a sound level of only 85 decibels.

This unit can be used with 7" grinding wheels, however, it does not have a wheel guard like a standard grinder. It can be used with a buffer pad or any grit, 7" sanding discs. The backing pad, and side handle are included and the side handle can be inserted on either side for right or left handed use.

IMPORTED.



### Specifications:

- Free Speed: 4,500 RPM
- Spindle: 5/8-11 Thread
- Air Consumption: 12 CFM
- Sound Level: 85 dBA
- Air Inlet: 1/4"
- Hose Size: 3/8"
- Weight: 6 1/2 lbs.



ITEM#:

DESCRIPTION:

279	7" SANDER - GRINDER - POLISHER
-----	--------------------------------

## CLASS # 20

# 4" AIR HAND GRINDER

This is a top of the line, heavy-duty, hand held, 4" angle air grinder. This is *not* an air die grinder but a full size unit with 11,000 RPM free speed at 90 to 120 PSI. It's 9" overall length and weighs just 4 1/2 pounds. It has a 3/8" spindle, and locater flanges, so it can accept any wheel with a 3/8" to 5/8" arbor size.

The grinder comes with the wheel guard, flanges, spanner wrenches, and side assist handle. The front exhaust keeps the work area clean in front of you. The throttle has the safety push lever to meet all OSHA requirements.



### Specifications:

- Free Speed: 11,000 RPM
- Air Pressure: 90 PSI
- Air Consumption: 6 CFM
- 1/4" Air Inlet
- 3/8" Hose Size
- 1 Grinding Wheel Included

**ITEM#:**

**264**

**DESCRIPTION:**

**4" AIR HAND GRINDER**

## CLASS # 20

# AIR POWERED RECIPROCATING SAW

This is an air powered reciprocating saw or 'air speed saw'. It works just like a regular sawzall except its smaller. It will cut sheet metal, bolts, angle iron and muffler pipe. Because of its small size, it will fit in places that your normal sawzall can't.

This saw features 10,000 strokes per minute and will zip through sheet metal up to 16 gauge. The working pressure is 90 PSI and air consumption is 6 CFM. IMPORTED

### Specifications:

- Capacity: 1.5 mm
- Free Speed: 10,000 RPM
- Stroke Length: 10 mm
- Air Inlet: 1/4" NPT
- Air Consumption: 6 CFM
- Working Pressure: 90 PSI
- Overall Length: 9 1/4"



**ITEM#:**

**DESCRIPTION:**

277

AIR POWERED RECIPROCATING SAW

## **CLASS # 20**

# **3/16" AIR RIVETER**

This air riveter gun is the perfect addition to any shop that uses an air compressor. Used for quick and easy repairs of sheet metal, plastic, or most any sheet material, this tool is handy and it's fast. Just hook it up to your air line and put the appropriate size rivet head on the gun and you're all set to reattach or mend any surface area.

This riveter will accommodate sizes 3/32", 1/8", 5/32", and 3/16" and will operate on 60 to 90 PSI of air pressure. It is 11" high and the head is 6" long. It comes with the four different size nose pieces to work with each of the rivet sizes mentioned above and it only weighs 3 1/2 Lbs. so that you can work continually without arm fatigue. 1/4" air inlet, 4.2 CFM. IMPORT



**ITEM#:**

**280**

**DESCRIPTION:**

**3/16" AIR RIVETER**

## CLASS # 20

# AIR PINSTRIPE REMOVAL KIT


This is a specialty air tool for the quick and easy removal of pinstripes, decals, molding adhesive, and double-faced tape. The tool is 8" long, weighs less than 3 lbs, and has an aluminum body.

The kit includes 12 'Smart Eraser<sup>®</sup>' pads and a spanner wrench for the easy changing of the pads. The rubber pads are 3 1/2" and are not for use on lacquer or acrylic lacquer paint. Extra 'Smart Eraser' Pads are also available.



### Specifications:

- Free Speed: 4,000 RPM
- Air Pressure: 90-120 PSI
- Air Consumption: 4 CFM
- Air Hose I.D. Size: 3/8"
- Air Inlet: 1/4"
- Built In Air Regulator
- Net Weight: 1 1/4 Lbs.

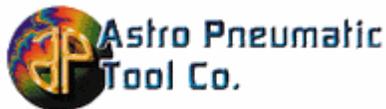

ITEM#:	DESCRIPTION:
289	AIR PINSTRIPE REMOVAL KIT W/ 12 PADS
289PAD	AIR PINSTRIPE REMOVAL PAD

# CLASS # 20

## AIR WINDSHIELD REMOVAL TOOL

This air powered windshield removal tool comes with 5 blades and is used for cutting the sealant around bonded and encapsulated glass and will clean and smooth moldings effectively and efficiently. It has a rear exhaust system to keep air away from the work and the operator as well as a teasing throttle regulator which provides easy speed control.

The flexible blade mount can be positioned 12 different ways, at 30° increments and the blades included are two 57 mm bent blades, one 90 mm round nose straight blade, one 52 mm bent curved blade and one 35 mm flat nose straight blade. Extra blades are also sold separately.



**Specifications:**

- 20,000 Oscillations Per Minute
- Stroke Arc: 3°
- Air Pressure: 90-120 PSI
- Vibration Level: 2.2 m/s<sup>2</sup>
- Air Consumption: 4 CFM
- Length: 8"
- Weight: 3 Lbs.

ITEM#:	DESCRIPTION:
<b>290</b>	<b>AIR WINDSHIELD REMOVAL TOOL</b>
<b>290BLD-E</b>	<b>57 mm BENT BLADE</b>
<b>290BLD-F</b>	<b>90 mm BENT BLADE</b>
<b>290BLD-G</b>	<b>35 mm ROUND NOSE STRAIGHT BLADE</b>

## CLASS # 20

# 6" COMPOSITE PALM AIR SANDER

This is the handy, new, finishing palm sander by 'Neiko Tools USA'. It has a heavy duty, composite body construction, lever housing and rotor. It's high powered but lightweight at only 6 Lbs. and features the new muffling system to reduce noise.

The orbital action assures a final, swirl-free finish, and it has a built in regulator for positive speed control. It is palm held with the power lever at the top for easy on and easy off, and it's lightweight, composite construction reduces hand and wrist fatigue. IMPORTED



### Specifications:

- Free Speed: 12,000 RPM
- Air Pressure: 90 – 120 PSI
- Air Consumption: 4 CFM
- Sound Pressure: 85 dBA
- Air Inlet: 1/4" NPT
- Air Hose Size: 3/8"
- Weight: 6 Lbs.
- Pad Size: 6"

**ITEM#:**

**DESCRIPTION:**

**N151**

**NEIKO 6" COMPOSITE PALM HELD AIR SANDER**

# CLASS # 20

## MICRO AIR DIE GRINDER

The ideal tool for polishing of dies, jewelry and for hobby use. It features a slim and comfortable design for greater accessibility, and a variable speed throttle control with a self closing lever.

This kit includes a convenient hose with hose protector, nipple and two collet wrenches.



### Specifications:

- Free speed: 54,000 RPM
- Capacity: 1/8" (3mm)
- Operation pressure: 90 PSI
- Air consumption: 1.4 CFM
- Air inlet: 1/4"
- Air hose: 3/8"
- Overall length: 5-1/4"



ITEM#:

DESCRIPTION:

N165

AIR MICRO DIE GRINDER KIT

## CLASS # 20 AIR NEEDLE SCALER

Pneumatic needle scalers are the perfect air tool for rust and scale removal. They are constructed of 19 steel needles that vibrate and spin to remove rust, dried concrete, paint, etc. from a lot of different materials, but mainly metal.

They have a free speed of 4,500 blows per minute, and run on 90 PSI of air pressure at 4 CFM air consumption. They measure 18" long and weigh just 6.2 Lbs. **IMPORTED**



**ITEM#:**

**N097**

**DESCRIPTION:**

**NEIKO AIR NEEDLE SCALER**


## CLASS # 20

# WHEELBARROW STYLE GAS AIR COMPRESSOR

This 10 gallon gas powered air compressor provides excellent portability and convenience for running air powered equipment out in the field or on the jobsite where an electric compressor is not practical.

It is a 'wheelbarrow' style air compressor with a large rubber wheel at the front in the center and two tubular handles with rubber grips at the back so it can be easily lifted onto the wheel and rolled from location to location.

This compressor features twin tanks with a 10 gallon capacity, a 6.5 HP motor, 125 psi air pressure and is approved by the environmental protection agency, (EPA) for non-polluting standards. Import.

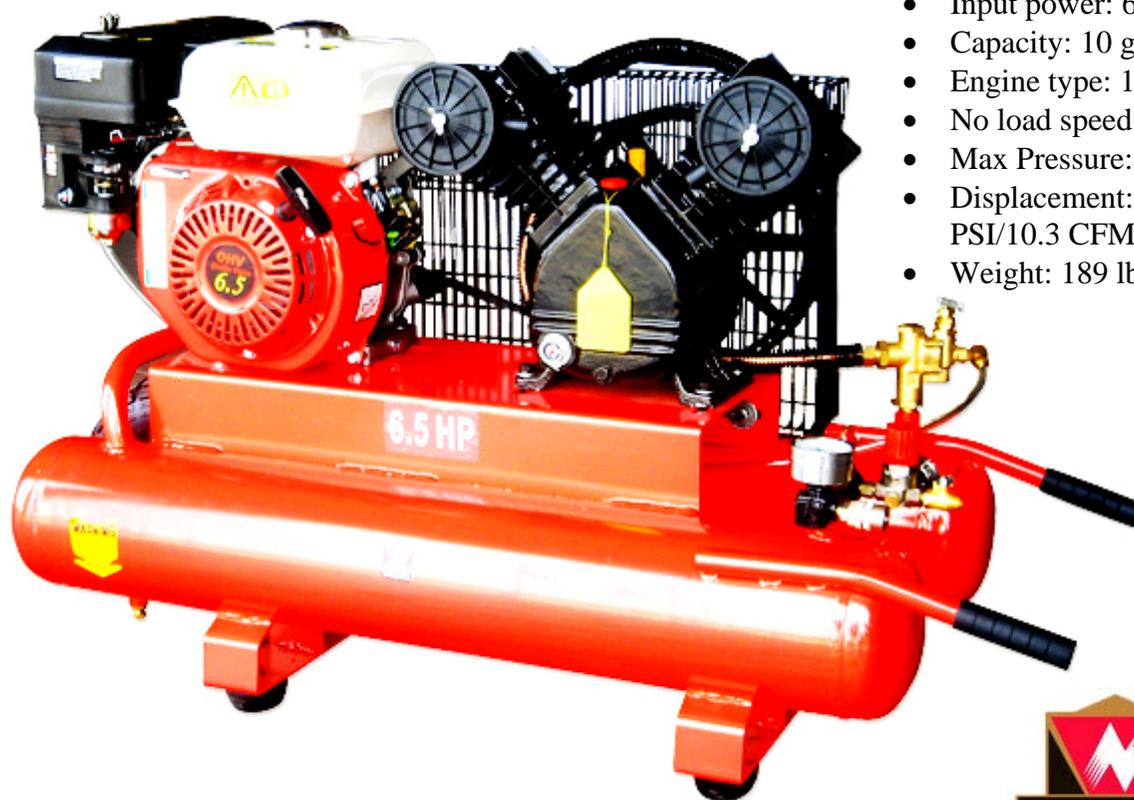

#### Specifications:

- Input power: 6.5 HP
- Capacity: 10 gallons
- Engine type: 168 F
- No load speed: 1200 rpm
- Max Pressure: 125 psi
- Displacement: 8.5 CF@90 PSI/10.3 CFM@40 PSI
- Weight: 189 lbs



**ITEM#:**

**DESCRIPTION:**

**N149**

**WHEELBARROW GAS AIR COMPRESSOR**

# CLASS # 20

## HAND CARRY AIR COMPRESSORS

These hand carry air compressors are lightweight, compact and extremely portable. They feature a single stage, direct coupled and oil lubricated pump with a cast iron cylinder for extended pump life. An aluminum head provides better heat dissipation along with the forced ventilation cooling system.

They have heavy duty, powder coated steel tanks and frame assemblies with protective mounted fittings and anti-vibration feet. They have an air line regulator and two gauges for line and tank pressure and a pressure relief safety valve as well as manual tank drains and special unloading valves to assist in motor/engine starts.

### 4.8 GALLON AIR COMPRESSOR



ITEM#: JE1

---

Specifications:

- 2 HP Pump
- 4.8 Gallon Twin Tank
- 115 Volt Drive
- 4.0 CFM @ 100 PSI
- 3.4 CFM @ 125 PSI
- Start/Stop Pressure Switch Control
- On/Off Switch
- Thermal Overload Motor Protection with Manual Reset
- 6' Power Cord

### 4 GALLON AIR COMPRESSOR



ITEM#: JE2

Specifications:

- 2 HP Pump
- 4 Gallon Twin Tank
- 115 Volt Drive
- 4.1 CFM @ 100 PSI
- 3.6 CFM @ 125 PSI
- Start/Stop Pressure Switch Control
- On/Off Switch
- Thermal Overload Motor Protection with Manual Reset
- 6' Power Cord
- Runs Approximately: 1-2 Framing Guns, 2-3 Roofing Guns, 3-5 Finishing Guns

# CLASS # 20

## WHEELED PORTABLE AIR COMPRESSORS

These single stage wheeled portable air compressors feature heavy duty cast iron compressor pumps made in Somerset, PA. USA. They're splash lubricated and belt driven with a large flywheel for extra cooling and easier start up.

They have a directional air shroud for reduced pump temperatures and a totally enclosed heavy duty belt guard. Other features include an oil sight glass, manual tank drain, anti-vibration feet, pneumatic tires, stainless steel braided discharge hose, pressure relief safety valve and large canister intake filter with replaceable filter elements. Each unit is filled with ultimate blue compressor oil.

### 8 GAL AIR COMPRESSOR



ITEM#: JE3

#### Specifications:

- 1.5 HP
- 8 Gallon Tank
- 115 Volt Single Phase
- 6.5 CFM @ 100 PSI
- 6.2 CFM @ 125 PSI
- High Quality Pilot Valve
- Industrial Grade UL Listed Electric Motor
- Thermal Overload Motor Protection
- 6' Power Cord
- Runs Approximately: 3-4 Framing Guns, 3-5 Roofing Guns, 7-9 Finishing Guns

---

### 8 GAL GAS COMPRESSOR W/ HONDA GX ENGINE



ITEM#: JG1

#### Specifications:

- 5.5 HP
- 8 Gallon Tank
- Honda GX Series OHV Gas Engine w/ Recoil Start
- 8.9 CFM @ 100 PSI
- 8.6 CFM @ 125 PSI
- Regulator and Outlet Pressure Gauge
- Tank Gauge
- Pressure Relief Safety Valve
- Large Canister Intake Filter w/ Replaceable Filter Elements
- Runs Approximately: 3-5 Framing Guns, 4-7 Roofing Guns